

HIOKI

Short Form Catalog Electrical Measuring Instruments

- P2 - POWER ANALYZERS
- P3 - POWER ANALYZERS / POWER METERS
- P4 - CURRENT SENSORS
- P5 - POWER QUALITY ANALYZERS / POWER LOGGERS
- P6 - OSCILLOSCOPES
- P7 - MEMORY RECORDERS
- P9 - WIRELESS LOGGING STATION / DATA LOGGERS
- P10 - IMPEDANCE ANALYZERS
- P11 - IMPEDANCE ANALYZERS / LCR METERS
- P12 - RESISTANCE METERS
- P13 - BATTERY TESTERS
- P14 - IMPULSE WINDING TESTERS
- P15 - SAFETY TESTERS
- P16 - INSULATION TESTERS
- P17 - CLAMP ON METERS
- P18 - PHASE DETECTORS / BYPASS DIODE TESTERS
- P19 - DIGITAL MULTIMETERS / EARTH TESTERS






POWER ANALYZER PW6001


Ultra-precise Measurement for High-efficiency Inverters & Motors



- Basic accuracy for power: $\pm 0.02\%$ rdg.
- High performance current sensor input
- 5MS/s sampling, 18 bit A/D resolution
- DC to 2MHz bandwidth
- 10ms fastest data update
- Max. 6ch (Synchronize 2 Units: 12ch)
- High-capacity waveform storage
- Powerful harmonic analysis (100th order)
- FFT analysis, user-defined parameter calculation
- Motor analysis (4ch), Efficiency analysis

HEV and EV measurement systems

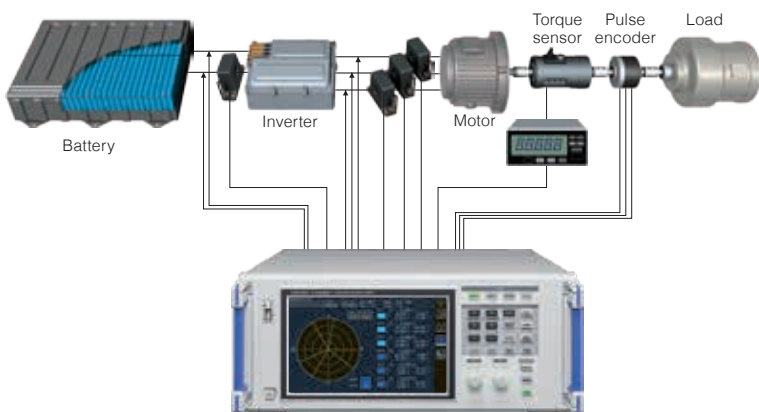

3-phase inverter

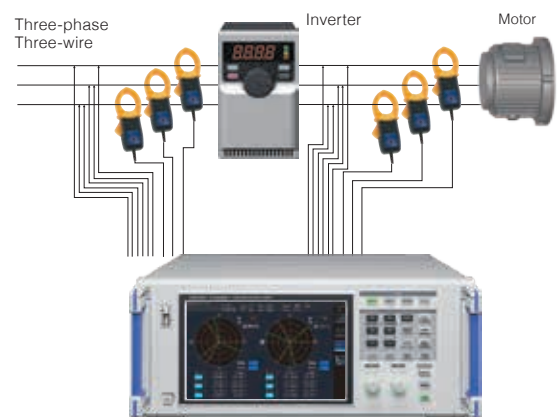



POWER ANALYZER PW3390

4ch High-precision Power Analyzer

- Basic accuracy: $\pm 0.04\%$ rdg. + current sensor accuracy
- Max. 4ch / High-capacity waveform storage
- 500kS/s sampling, DC to 200 kHz bandwidth, 50ms data update
- High performance harmonic analysis (100th order)
- Motor analysis (3ch), Efficiency analysis, FFT Analysis
- For high-efficiency inverters & motors (EV/HEV/PHV)
- For solar & wind power generation and smart grids
- Evaluate WLTP Mode Performance - A new Fuel Economy Standard

POWER METER PW3337

3ch High-performance AC/DC Power Meter



- Basic accuracy: $\pm 0.1\%$ rdg. (DC, 50/60Hz)
- 100kHz bandwidth, 65 A AC/DC direct input
- Built-in external current sensor input terminals (up to 5000A AC)
- Harmonic analysis (50th order), IEC 61000-4-7 compliant
- High-accuracy measurement, even with a low power factor
- Ideal for no-load testing of transformers and motors


POWER METER PW3335

Single-Phase AC/DC Power Meter




- Basic accuracy: $\pm 0.1\%$ (DC, 50/60Hz)
- Wide current range (1mA to 20A)
- Built-in external current sensor input terminals (up to 5000A AC)
- Harmonic analysis (50th order), IEC 61000-4-7 compliant
- High-accuracy measurement, even with a low power factor
- For standby power consumption testing of home appliances (IEC62301-compliant)

Current Sensor Types	External appearance	Model	Rating	Frequency characteristics	Basic accuracy (Amplitude)	Basic accuracy (Phase)	Operating temperature range	Measurable conductor diameter
Ultra-High Accuracy Pass-Through		CT6904	500 A	DC to 4 MHz	$\pm 0.02\% \text{rdg. } \pm 0.007\% \text{f.s.}$	Within $\pm 0.08^\circ$	-10°C to 50°C (14°F to 122°F)	ϕ 32 mm (1.26 in)
		CT6904-60	800 A	DC to 4 MHz	$\pm 0.025\% \text{rdg. } \pm 0.009\% \text{f.s.}$	Within $\pm 0.08^\circ$	-10°C to 50°C (14°F to 122°F)	ϕ 32 mm (1.26 in)
High Accuracy Pass-Through		CT6862-05	50 A	DC to 1 MHz	$\pm 0.05\% \text{rdg. } \pm 0.01\% \text{f.s.}$	Within $\pm 0.2^\circ$	-30°C to 85°C (-22°F to 185°F)	ϕ 24 mm (0.94 in)
		CT6863-05	200 A	DC to 500 kHz	$\pm 0.05\% \text{rdg. } \pm 0.01\% \text{f.s.}$	Within $\pm 0.2^\circ$	-30°C to 85°C (-22°F to 185°F)	ϕ 24 mm (0.94 in)
		CT6875	500 A	DC to 2 MHz	$\pm 0.04\% \text{rdg. } \pm 0.008\% \text{f.s.}$	Within $\pm 0.1^\circ$	-40°C to 85°C (-40°F to 185°F)	ϕ 36 mm (1.42 in)
		CT6876	1000 A	DC to 1.5 MHz	$\pm 0.04\% \text{rdg. } \pm 0.008\% \text{f.s.}$	Within $\pm 0.1^\circ$	-40°C to 85°C (-40°F to 185°F)	ϕ 36 mm (1.42 in)
		CT6877	2000 A	DC to 1 MHz	$\pm 0.04\% \text{rdg. } \pm 0.008\% \text{f.s.}$	Within $\pm 0.1^\circ$	-40°C to 85°C (-40°F to 185°F)	ϕ 80 mm (3.15 in)
High Accuracy Clamp		CT6841-05	20 A	DC to 1 MHz	$\pm 0.3\% \text{rdg. } \pm 0.01\% \text{f.s.}$	Within $\pm 0.1^\circ$	-40°C to 85°C (-40°F to 185°F)	ϕ 20 mm (0.79 in)
		CT6843-05	200 A	DC to 500 kHz	$\pm 0.3\% \text{rdg. } \pm 0.01\% \text{f.s.}$	Within $\pm 0.1^\circ$	-40°C to 85°C (-40°F to 185°F)	ϕ 20 mm (0.79 in)
		CT6844-05	500 A	DC to 200 kHz	$\pm 0.3\% \text{rdg. } \pm 0.01\% \text{f.s.}$	Within $\pm 0.1^\circ$	-40°C to 85°C (-40°F to 185°F)	ϕ 20 mm (0.79 in)
		CT6845-05	500 A	DC to 100 kHz	$\pm 0.3\% \text{rdg. } \pm 0.01\% \text{f.s.}$	Within $\pm 0.1^\circ$	-40°C to 85°C (-40°F to 185°F)	ϕ 50 mm (1.97 in)
		CT6846-05	1000 A	DC to 20 kHz	$\pm 0.3\% \text{rdg. } \pm 0.01\% \text{f.s.}$	Within $\pm 0.1^\circ$	-40°C to 85°C (-40°F to 185°F)	ϕ 50 mm (1.97 in)
High Accuracy Direct Connection		PW9100-03 PW9100-04	50 A	DC to 3.5 MHz	$\pm 0.02\% \text{rdg. } \pm 0.005\% \text{f.s.}$	Within $\pm 0.1^\circ$	0°C to 40°C (32°F to 104°F)	Measurement terminals M6 screws
High Accuracy Clamp		9272-05	20 A, 200 A	1 Hz to 100 kHz	$\pm 0.3\% \text{rdg. } \pm 0.01\% \text{f.s.}$	Within $\pm 0.2^\circ$	0°C to 50°C (32°F to 122°F)	ϕ 46 mm (1.81 in)
Wideband Clamp		CT6710	0.5 A, 5 A, 30 A	DC to 50 MHz	Typical $\pm 1.0\% \text{rdg. } \pm 1 \text{ mV}$ (30 A range /5 A range)	-	0°C to 40°C (32°F to 104°F)	ϕ 5 mm (0.20 in)
		CT6711	0.5 A, 5 A, 30 A	DC to 120 MHz	Typical $\pm 1.0\% \text{rdg. } \pm 1 \text{ mV}$ (30 A range /5 A range)	-	0°C to 40°C (32°F to 104°F)	ϕ 5 mm (0.20 in)
		CT6700	5 A	DC to 50 MHz	Typical $\pm 1.0\% \text{rdg. } \pm 1 \text{ mV}$	-	0°C to 40°C (32°F to 104°F)	ϕ 5 mm (0.20 in)
		CT6701	5 A	DC to 120 MHz	Typical $\pm 1.0\% \text{rdg. } \pm 1 \text{ mV}$	-	0°C to 40°C (32°F to 104°F)	ϕ 5 mm (0.20 in)
		3273-50	30 A	DC to 50 MHz	$\pm 1.0\% \text{rdg. } \pm 1 \text{ mV}$	-	0°C to 40°C (32°F to 104°F)	ϕ 5 mm (0.20 in)
		3276	30 A	DC to 100 MHz	$\pm 1.0\% \text{rdg. } \pm 1 \text{ mV}$	-	0°C to 40°C (32°F to 104°F)	ϕ 5 mm (0.20 in)
		3274	150 A	DC to 10 MHz	$\pm 1.0\% \text{rdg. } \pm 1 \text{ mV}$	-	0°C to 40°C (32°F to 104°F)	ϕ 20 mm (0.79 in)
		3275	500 A	DC to 2 MHz	$\pm 1.0\% \text{rdg. } \pm 5 \text{ mV}$	-	0°C to 40°C (32°F to 104°F)	ϕ 20 mm (0.79 in)



Transient overvoltage



High-order harmonics

POWER QUALITY ANALYZER PQ3198

The New World Standard for Power Quality Analysis

- Class A compliance (IEC61000-4-30)
- Basic voltage measurement accuracy of $\pm 0.1\%$
- High-voltage, wideband performance
- Two-circuit measurement
- Simple inverter measurement
- DC, 50Hz, 60Hz, 400Hz line measurement
- GPS time synchronization
- Extensive array of event measurement parameters



CLAMP ON POWER LOGGER PW3365

Ensure Safety with the World's First Non-Metallic Contact Energy Logger

- Dedicated voltage sensor delivers non-metallic contact testing
- Voltage measurement up to 520V
- Simple, fast and reliable measurement using QUICK SET function
- Store months of data on SD cards



CLAMP ON POWER LOGGER PW3360

Easy to Use Energy Logger to Support Power Consumption Management

- See demand and trend graphs on site
- Supports single-phase to three-phase 4-wire circuits
- Measure up to 780V with a 1000V display range
- Harmonic analysis to 40th order (PW3360-21)



MEMORY HiRECORDER MR6000

200MS/s high speed measurement with isolated inputs
Save long-term measurements in real-time

- 200MS/s high-speed isolated measurement with U8976 Analog Unit
- Measure 32 channels simultaneously with U8975 4ch Analog Unit
- Capture a wide variety of signals such as voltage, current, temperature, vibration, logic, etc.
- SSD, HDD, USB3.0, SD, PC interfaces
- High-speed, real-time save of 1MS/s data across all 32 channels to SSD
- 12.1" touchscreen
- Optional power supply for current probes
- Calculate waveforms while measuring with digital filters (MR6000-01)

Measure inverter signals at high speeds of 200MS/s



Achieve 200MS/s x 16 channels of high speed, isolated measurements with 8 units of U8976

Multi-channel testing ideal for ECU development





Measure 32 channels all simultaneously at a speed of 5MS/s with 8 units of U8975

Eliminate specific frequency noise



MR6000-01's real-time digital filter calculation function lets you measure waveforms that exclude noise from specific frequencies

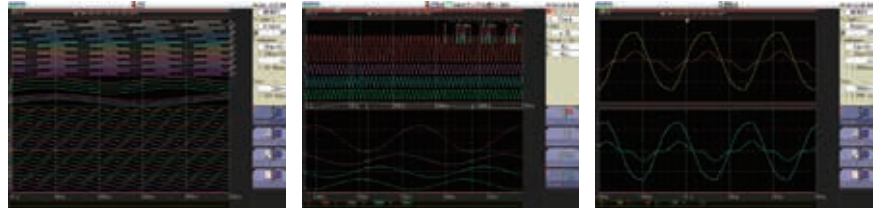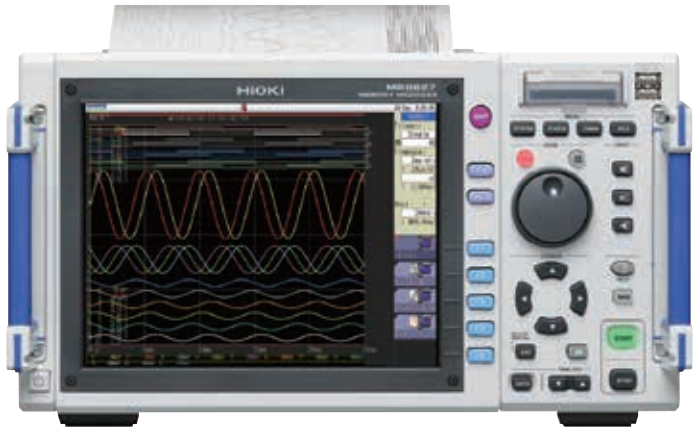

MEMORY HiCORDER MR8827

Perfect for Multi-channel Waveform Recording

- Analog 32ch + Logic 32ch to Analog 28ch + Logic 64ch
- Max. 20MS/s simultaneous sampling across all channels
- Isolated input on all channels ensures safety
- Built-in 512MW memory
- Measure signals of multiple systems at the same time
- Ideal for utilities and power generation (thermal / hydro / solar & wind power generation)



MEMORY HiCORDER MR8847A (MR8847-51/52/53)

Combine Waveform Recording and Generating Functions for Simulation Testing

- Compatible with new ARBITRARY WAVEFORM GENERATOR UNIT (U8793)
- Analog 16ch + Logic 16ch to Analog 10ch + Logic 64ch
- Max. 20MS/s simultaneous sampling across all channels
- Isolated input on all channels ensures safety
- 3 memory capacities: 64MW (-51) / 256MW (-52) / 512MW (-53)
- Ideal for heavy electromechanical applications (motors, transformers, inverters, UPS, switching power supplies)

NON-CONTACT AC VOLTAGE & CAN BUS SENSORS SP3000 / SP7000

Measure Signals at the Wiring Harness

- Measure CAN bus or AC voltage signals on the insulated conductor
- Precise CAN FD and CAN signal sensing over the cable insulation (SP7000)
- Observe waveforms with an oscilloscope or a recorder by visualizing signals from electric equipment simply by applying the probe to the wire's insulation (SP3000)
- Highly functional design for measurements even in difficult to access areas
- Ideal for measuring signals from electric equipment on vehicles




SP3000

SP7001-90



MEMORY RECORDERS

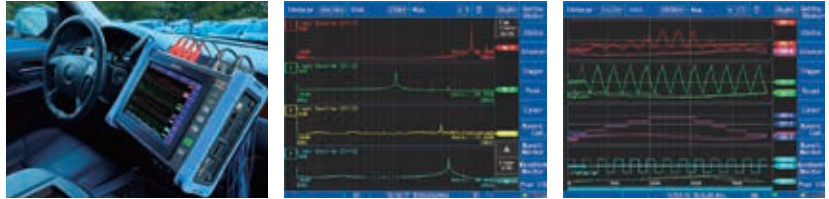

MEMORY HiCORDER

MR8875

1000 V Direct Input Multi-channel Portable Logger

- Portable A4 compact size (Analog 16ch + Logic 8ch + Pulse 2ch)
- 1000V input (DC or RMS) with new Analog Unit MR8905
- Max. 2 μ sec high-speed simultaneous logging across all input channels
- CAN-Bus signal input for vehicle testing
- Ideal for automotive testing (EV/HEV motors, ECU, batteries)
- Railway, ship and avionic applications



MEMORY HiCORDER

MR8880

Rugged, Professional and Ready for the Field

- 4 completely isolated channels (3-phase power line + 1 extra channel)
- CAT III 600V isolation performance; directly measure a 480V power line
- Tough against harsh environments (-10°C to 50°C)
- Geared for electrical maintenance and service applications

MEMORY HiLOGGER

MR8870


Includes Recording of RMS Variations in a Single Device

- New mode for recording RMS fluctuations in addition to waveform mode
- Synchronize 2 units to create a 4-channel recorder via PC application
- Powerful analysis in a compact and easy-to-carry device
- Ideal for on-the-go maintenance work





Plug-in units U855x (5 types)
(Compatible with both LR8450 and LR8450-01)

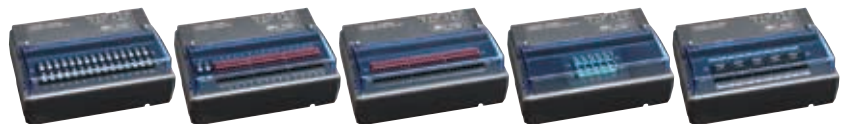

Wireless units LR853x (use with LR8450-01)

MEMORY HILOGGER LR8450 series

Portable 330ch Data Logger with Wireless & Plug-in Units

- Measure dynamic strain wirelessly at 1 ms sampling rate
- Connect max. 11 units simultaneously (7 wireless units & 4 plug-in units)
- Voltage / Strain / Temperature / Humidity / Resistance
- Ideal for onboard-testing of vehicles and other field applications
- Control the logger remotely and download data files to a computer



WIRELESS LOGGING STATION LR8410

Wireless Multi-channel Data Logging via Bluetooth®

- DC Voltage / Temperature / Humidity / Pulse / Current / Resistance / Rotation
- 15ch to 105ch isolated input wireless logger
- Connect up to 7 logging modules with easy configuration
- High-speed 100 ms sampling across all channels
- Eliminate long wires and reduce noise effects



MEMORY HILOGGER LR8431 / LR8432

LR8431 : Portable 10ch Data Logger

- DC Voltage / Temperature / Pulse / Rotation
- 10ms sampling and recording across all channels

LR8432 : Simplify heat flow measurement

- Ideal for evaluating insulation performance and temperature change
- Visualize the underlying causes of temperature change







IMPEDANCE ANALYZER IM758x series


- Impedance Analyzer Mode / LCR Measurement Mode
- 0.5ms high-speed testing (analog measurement time)
- High stability measurement: 0.07% variation of the measured value (typical)
- Equivalent circuit analysis (5 types)
- Contact check function ensures reliable testing
- For high-frequency inductors and capacitors
- For common-mode filters / ferrite bead arrays / power inductors

A rich lineup covering a wide range of measurement frequencies

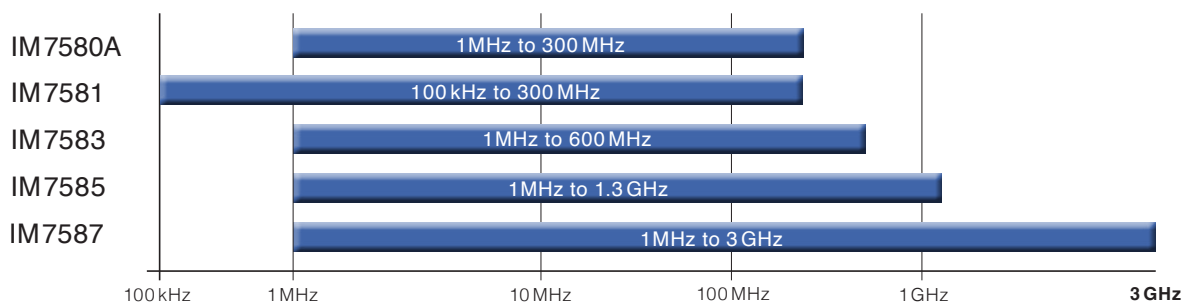



Cole-Cole plot



Electrochemical equivalent circuit analysis

CHEMICAL IMPEDANCE ANALYZER IM3590

1 mHz to 200 kHz Measurement Frequency

- Measure internal impedance of battery cells thanks to automatic adjustable DC Bias
- Measure LCR impedance for Cole-Cole plots and equivalent-circuit analyses of electro-chemical components and materials
- Easy operation with 5.7" touch display
- Basic accuracy of $\pm 0.05\%$



LCR METER IM3536

DC, 4Hz to 8MHz Measurement Frequency

- The new standard for high-speed and high-stability LCR meters
- High $\pm 0.05\%$ rdg. precision and 1ms high-speed testing
- Built-in contact check function and guaranteed accuracy range from 1m Ω deliver high reliability
- For capacitors and inductors, resistors and electronic components
- Simplifies the process of building production lines



IM3523



IM3533

LCR METER IM3523 / IM3533

IM3533: DC, 1mHz to 200kHz

IM3523: DC, 40Hz to 200kHz



- High $\pm 0.05\%$ rdg. accuracy and 2ms measurement time
- For capacitors, inductors, resistors and electronic parts
- IM3533: Ideal for winding coil and transformer production lines to measure turn ratio N, mutual inductance M, and inductance difference ΔL using DCR measurement with temperature compensation, R&D, and electrochemical applications
- IM3523: Perfect for integration into production lines and automated testing

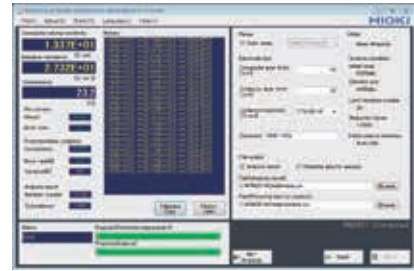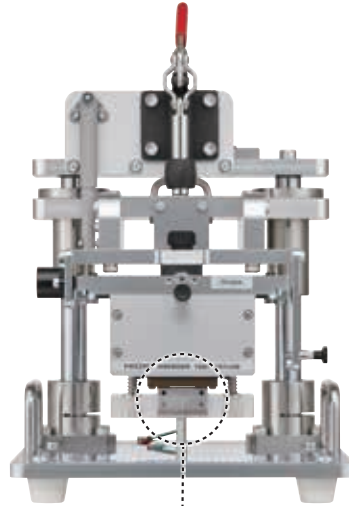

Enlarged view of probes



Electrode sheet diagram
 Composite layer
 Interface between composite and current collector
 Current collector



ELECTRODE RESISTANCE MEASUREMENT SYSTEM RM2610

Quantify composite layer resistance and interface resistance in Li-ion battery electrode sheets

- Measure composite resistivity [Ωcm]
- Measure interface resistance between the composite layer and current collector [Ωcm^2]



Multiplexer Unit Z3003

RESISTANCE METER RM3544 / RM3545

High-accuracy, Low Resistance Meter

- RM3545 : Wide Range 10 mΩ to 1000 MΩ DC Resistance Meters with Multiplexer Option for High-speed Multi-point Testing
- RM3544 : Wide Range 30 mΩ to 3 MΩ DC Resistance Meters with Temperature Correction for High Speed Testing on Production Lines
- Measurement speed : 2.2ms (RM3545), 18 ms (RM3544)
- Resolution : 0.01 $\mu\Omega$ (RM3545), 1 $\mu\Omega$ (RM3544)




RESISTANCE METER RM3548

High-precision Portable Low Resistance Meter

- 0.02% basic accuracy
- 0.1 $\mu\Omega$ best resolution, 1A maximum measured current
- Max. 3.5MΩ measurement range
- Easy operation and easy recording of up to 1000 data sets
- Portable design ideal for maintenance and testing of large equipment




Conceptual diagram of a battery




Lithium ions move between electrodes through the electrolyte

Battery equivalence circuit



Measurement at low frequency reveals the reaction resistance of the battery

Cole-Cole Plot



BATTERY IMPEDANCE METER BT4560

Determine Li-ion Battery Reliability in Just 10 Seconds

- Low-frequency AC-IR measurement to manage reaction resistance
- Evaluate cell output characteristics with AC-IR measurement as an alternative to inspecting charge/discharge output characteristics (DC-IR)
- Variable measurement frequency (0.1Hz to 1050Hz)
- Up to 5V of allowable input voltage (for Li-ion battery cells)
- Extremely reliable measurements for low-impedance batteries
- Simultaneous measurement of impedance and voltage
- Create Cole-Cole plots using bundled software



BT3561A: Small cells for power motors Small packs of up to 60 V
 BT3562A: Large cells for xEVs Mid-size packs up to 100 V
 BT3563A: Large packs for xEVs or Large packs up to 300 V

BATTERY HiTESTER

BT3561A / BT3562A / BT3563A

Designing automatic battery testing systems is easier and faster than ever before

- Double the total line resistance, so measurement errors are less likely to occur when using long measurement cables
- Stable operation regardless of increased total line resistance due to probe and relay degradation
- LAN is equipped as a standard for easy system design and layout, and excellent noise resistance for stable operation
- Improved electrostatic resistance as a countermeasure against electrostatic charges during battery transport on a production line



BT3554-50
Instrument only



BT3554-51
9465-10 bundle



BT3554-52
L2020 bundle

BATTERY TESTER

BT3554-50 / BT3554-51 / BT3554-52

Streamline UPS and lead-acid battery diagnostics with measurement and recording guidance

- Most popular portable battery tester for large lead-acid and UPS batteries
- Measure and save data in 2 seconds
- Comparator function for quick pass/fail/warning decision
- Wireless communications (when the Z3210 is connected)

Bluetooth
When Z3210 is installed





IMPULSE WINDING TESTER ST4030A


Diagnose the Insulation Quality and Deterioration of Rotor Windings while in Assembled State via Response Waveform Quantification

- Identify previously undetectable defects
- Detect waveforms with high precision (200 MHz high speed sampling × high 12-bit resolution)
- Identify single-fault turns via quantification of response waveforms
- Diagnose defective insulation (pseudo-shorts) between motor windings by testing for microscopic partial discharges hidden in noise (option)
- Applied output voltage up to 4200 V

Detect hard to identify shorts among even just a few turns


Conventional approach

Area comparison based on waveforms

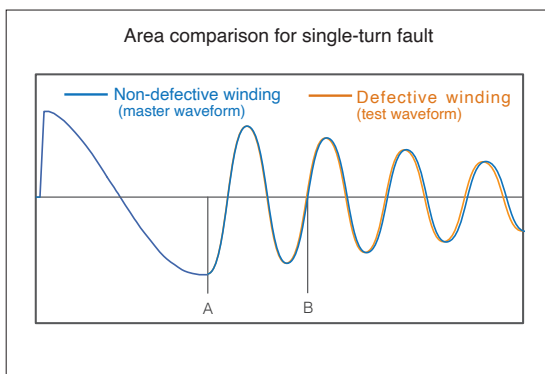

New approach

Quantification of response waveforms

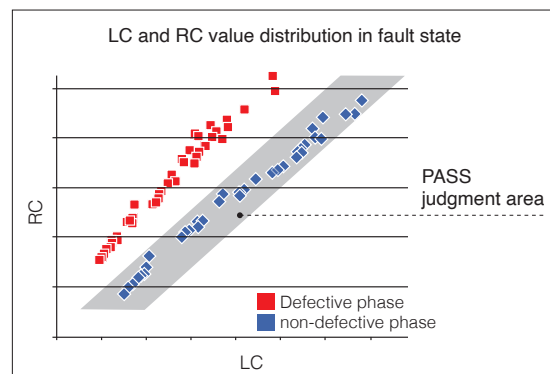



LEAK CURRENT HiTESTER ST5540 / ST5541

ST5540 : Leakage Current Testing for Medical Electrical Equipment

ST5541 : For General Electrical Equipment

- Ground leak current, contact leak current, patient leak current, total patient leak current
- IEC 60601-1, IEC60990 (ST5540), IEC60950-1, IEC60335-1, IEC 60065 (ST5540, ST5541), etc.
- Automatically test using the uninterruptible polarity switching function
- Support for rated currents up to 20A designed to comply with new standards
- USB interface and external I/O support enable automatic testing on production lines



INSULATION TESTER ST5520

Industry's Fastest Testing Speed (Max. 50ms)

- Freely configurable test voltage (set from 25V to 1000V)
- High-speed auto discharge function
- Short-circuit check function (stop potential defects)
- Contact check function (prevent errors due to poor contact)



AUTOMATIC INSULATION / WITHSTANDING HiTESTER 3153 / 3174

AC/DC Hi-Pot Tester (Electrical Safety Test)

- Withstanding voltage: AC/DC 5kV / 500VA (3174 AC only)
- Insulation resistance test voltage: DC50V to 1200V (1V step)
- Full remote control from a PC (Voltage / Comparator / Timer)
- Can be saved 32 ways with programmable test settings
- Model 3153 connectable with dedicated scanner Model 3930



INSULATION TESTER IR4057-50

- 5 ranges from 50 V / 100 MΩ to 1000 V / 4000 MΩ
- CAT III 600V / EN61557 compliant
- Fast PASS / FAIL decision 0.3 sec
- Bright LED backlight
- Auto ACV/DCV detection (600V range)
- Wireless communications (when the Z3210 is connected)

 **Bluetooth®**
When Z3210 is installed



ANALOG MΩ HiTESTER 3490

- 3 ranges from 250 V / 100 MΩ to 1000 V / 4000 MΩ
- CAT III 600V / EN61557 compliant
- Convenient integrated case (including test leads)
- AC voltage measurement



INSULATION TESTER IR4053

- 5 test ranges from 50 V / 100 MΩ to 1000 V / 4000 MΩ
- Insulation resistance meter and PV panel insulation tester all in one unit
- Non-short-circuit measurement method of IEC 62446 (PV panel mode)
- High speed display (PV mode: 4sec.)
- EN61557 compliant



INSULATION TESTER IR3455

- Measure insulation of high-voltage equipment (such as transformers, cables, and motors)
- Wide testing voltage range, up to 5.00 kV from 250 V DC
- Wide measurement insulation range, up to 10 TΩ
- PI (Polarization Index) and DAR (Dielectric Absorption Ratio) automatically calculated / display
- Data memory function to reduce handwritten notes
- Bright LED luminous scale
- Extended operating temperature range of -10 °C to 50 °C



AC CLAMP METER 3280-10F/-20F

- Pocket AC clamp meter with optional flexible clamp sensor attachment
- 3280-10F (MEAN)
- 3280-20F (True RMS)
- Wide 42.00 A AC to 1000 A AC range
- AC/DC voltage and resistance
- Compact and only 16mm thin
- ϕ 33mm, CAT III 600V (current)



AC CLAMP METER CM3289

- New redesigned sensor for even easier clamping
- Expanded -25 °C to 65 °C operating temperature range
- Measure even harmonic waveform components using the True RMS method
- Connect the CT6280 flexible sensor to measure up to 4199 A in thick or paired wires



AC CLAMP METER CM4141 / CM4142

- Easily get into tight spaces between cables thanks to thin sensor with a minimum cross-section of 11 mm
- Measure up to 2000 A AC
- Expanded -25 °C to 65 °C operating temperature range
- Bluetooth® function to display data in real time and create reports (CM4142)



AC/DC CLAMP METER CM4375 / CM4376

- Easily get into tight spaces between cables thanks to thin sensor structure
- Measure up to 1000 A
- Automatic AC/DC function helps boost work efficiency
- Simultaneously measure inrush current in RMS and crest values
- Expanded -25 °C to 65 °C operating temperature range
- 3-year guarantee
- Bluetooth® function to display waveforms in real time and create reports (CM4376) on mobile devices



AC LEAKAGE CLAMP METER CM4002 / CM4003

- For leakage current measurement
- 6 ranges (0.060 mA AC to 200.0A AC)
- Supports up to ϕ 40mm conductors
- Frequency testing
- True RMS
- CAT IV 300V, CAT III 600V (CM4002)
- CAT III 300V (CM4003)
- External output, External power supply (CM4003 only)
- Wireless communications (when the Z3210 is connected)



When Z3210 is installed



AC CLAMP POWER METER CM3286

- Display four parameters simultaneously
- A handheld power meter that measures from 5 W of power and 60 mA of current
- Measure power ranging from 5 W at a low current of 60 mA to 360 kW
- In addition to current, voltage, and power, measure simple integral power consumption and phase sequence
- Features and functions deliver fast and efficient testing
- Bluetooth® function for live tracking to a tablet or smartphone (CM3286-01)



DIGITAL PHASE DETECTOR PD3259-50

- Non-metallic contact voltage detection and testing
- Simply clip onto wire insulation
- Phase detection check and line-to-line voltage inspection at the same time
- Easy and intuitive phase detection check with backlight and buzzer
- Wireless communications (when the Z3210 is connected)

 **Bluetooth®**
When Z3210 is installed



PHASE DETECTOR PD3129-10

- Simply clip clamps onto wire insulation
- Green LED arrow clearly shows phase direction, perfect for visual reports
- Rotating LED indicator shows the phase sequence for a 3-phase power supply at a glance
- Intermittent beeps signal positive phase; continuous tone signals reverse phase

LUX METERS / BYPASS DIODE TESTER



LUX METER FT3424 / FT3425

- Compatible with LED lighting
- Complies with DIN 5032-7:1985 class B and JIS C 1609-1:2006 general AA class
- Timer hold function lets you make measurements in remote locations while avoiding the effects of shadows and reflections



BYPASS DIODE TESTER FT4310

- Inspect solar panel diodes for open and short-circuit faults even in broad daylight
- Built-in wireless Bluetooth® technology to transfer data and create reports live
- Save time - measure all electrical parameters simultaneously*
*Open-circuit voltage, Short-circuit current, Bypass route resistance



**DIGITAL MULTIMETER
DT422X**

- Premier Pocket DMM with CAT IV 300V/ CAT III 600V Safety



**DIGITAL MULTIMETER
DT425X**

- Standard DMM that Delivers Top Safety and Reliability
- General Purpose Testers with Rich Measurement Functions



**DIGITAL MULTIMETER
DT428X**

- World's Premier Digital Multimeter. Superior Accuracy and High Response, Topped with Safety Terminal Shutters

EARTH TESTERS



**CLAMP ON EARTH TESTER
FT6380-50**

- For grounding resistance measurement
- Thinnest and lightest core in industry
- True RMS, CAT IV 600V
- Memory to store 2000 data sets
- Wireless communications (when the Z3210 is connected)



**EARTH TESTER
FT6031-50**

- 2-pole method / 3-pole method
- 3 ranges (20.00Ω to 2000Ω)
- EN61557 compliant
- IP67 (dustproof and waterproof)
- Completely submersible in water
- Automatically check cable breaks
- CAT II 300V/CAT III 150V
- Wireless communications (when the Z3210 is connected)



**ANALOG EARTH TESTER
FT3151**

- Three-electrode method, Two-electrode method
- Wide measurement range for 0 to 1150 Ω, based on EN standard
- Switchable measurement frequency to reduce the effects of power supply harmonics
- Dramatically faster setup: Comes with improved grounding rods and cord winders

HIOKI
HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi,
Ueda, Nagano 386-1192 Japan
<https://www.hioki.com/>



Scan for all
regional contact
information

Note: Company names and product names appearing in this brochure are trademarks or registered trademarks of various companies.

DISTRIBUTED BY