


# HIOKI


DIGITAL PHASE DETECTOR  
PD3259

NEW

Until now, laying a 3-phase power line meant...

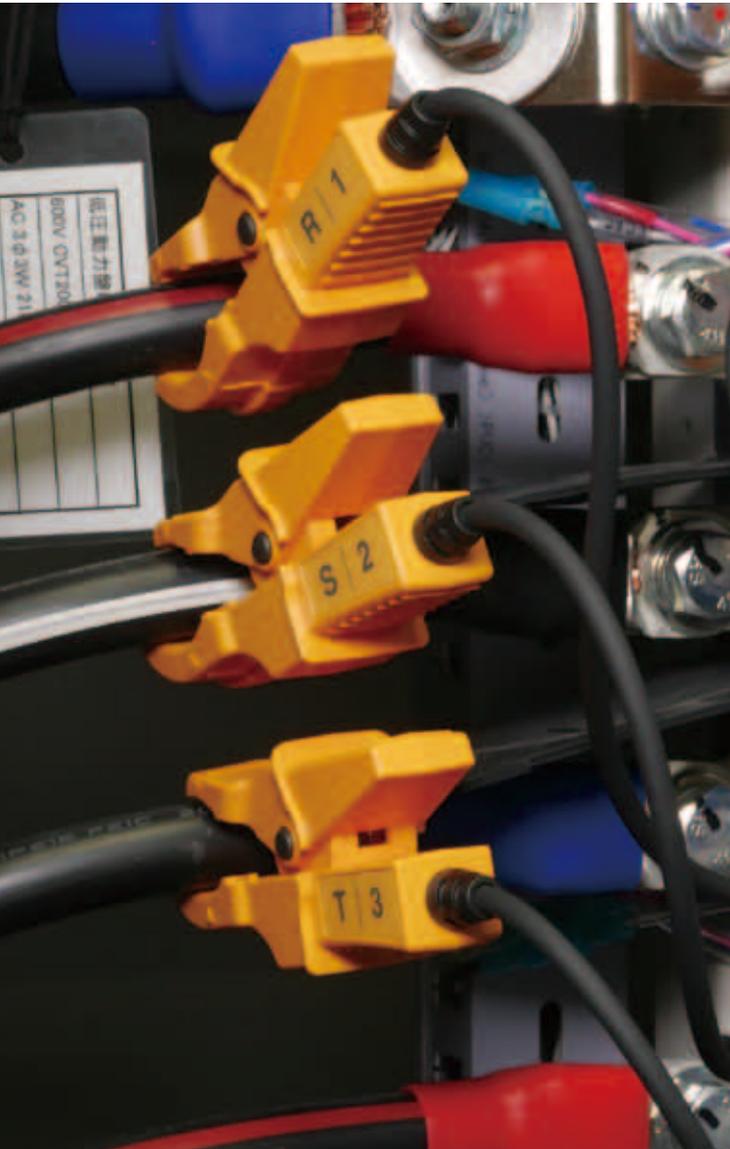

1 phase  
detection check

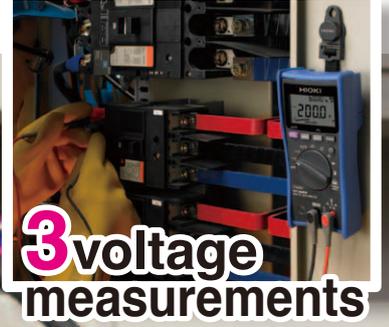

3 voltage  
measurements



World First Non-Metallic Contact  
Now, with the PD3259 digital phase detector...

Safe


Fast

Just clip the probes onto covered cables, and your 3-phase power line inspection is complete!




# All the info you need on one large display

**Positive** phase sequence display

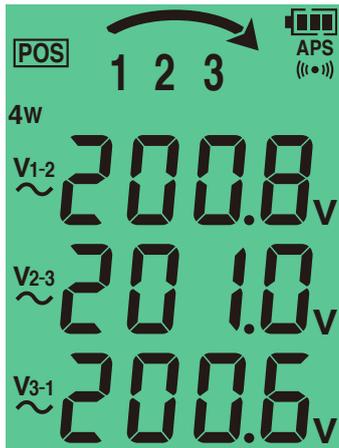

Green backlight with beeping tone

**Negative** phase sequence display

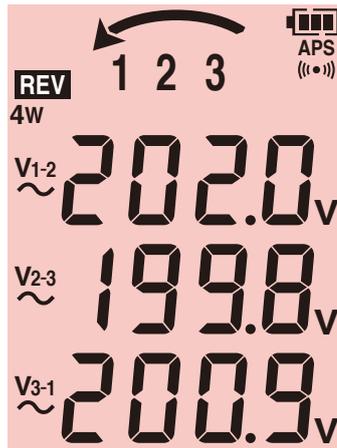

Red backlight with continuous tone



**Handy for work certification photos**

Display phase sequence, 3-phase voltage  
Use as-is in work certification photos

## Specifications (Accuracy guarantee: 1 year, Post-adjustment accuracy guarantee: 1 year) Product guarantee: 3 years

Detection functions	Phase detection, open phase, prediction of ground phase (Three-phase line)	Response time	3 s max.
Measurement parameters	Three-phase AC voltage (line-to-line voltage and voltage to ground) and frequency	Display update rate	500 ms
Voltage measurement accuracy	±2.0% rdg. ±8 dgt.	Hold functionality	HOLD key freezes reading
Frequency measurement accuracy	±0.5% rdg. ±1 dgt.	Drop proof	On concrete: 1 m (3.28 ft)
Measurement targets	Covered cables, metal portions, Use on shielded cables not supported Three-phase 90.0 to 520.0 V AC (45 to 66 Hz)	Dust-proofness, water-proofness	IP54 (device body only)
Diameter of measurable conductors	Finished outer diameter: 6 to 30 mm (0.24 to 1.18 in)	Auto power-off	Power shut off when keys not operated for 10 minutes
Maximum rated voltage to earth	600 V AC (CAT IV)	Battery low warning	Remaining battery power indicated in 4 levels
Standards	Safety: EN61010, EMC: EN61326 Class A	Power supply	Four AA alkaline batteries (LR6) Continuous operating time: approx. 5 hours
		External dimensions	Device body: 84 mm (3.31 in)W x 146 mm (5.75 in)H x 46 mm (1.81 in)D, Cord length: 0.5 m (1.64 ft)
		Mass	Approx. 590 g (20.8 oz) with batteries fitted



**Model : DIGITAL PHASE DETECTOR PD3259**

Model No. (Order Code) (Note)  
**PD3259**

Buddled accessories: AA alkaline batteries (LR6) ×4, Instruction manual ×1, Carrying case C0203 ×1, Spiral tubes (black ×1, red ×2, blue ×2, yellow ×2)

## Options



# HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi, Ueda, Nagano, 386-1192, Japan  
TEL +81-268-28-0562 FAX +81-268-28-0568  
http://www.hioki.com / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION

TEL +1-609-409-9109 FAX +1-609-409-9108  
http://www.hioki.com / E-mail: hioki@hioki.com

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI (Shanghai) SALES & TRADING CO., LTD.  
TEL +86-21-63910090 FAX +86-21-63910360  
http://www.hioki.cn / E-mail: info@hioki.com.cn

DISTRIBUTED BY

HIOKI SINGAPORE PTE. LTD.  
TEL +65-6634-7677 FAX +65-6634-7477  
E-mail: info-sg@hioki.com.sg

HIOKI KOREA CO., LTD.  
TEL +82-2-2183-8847 FAX +82-2-2183-3360  
E-mail: info-kr@hioki.co.jp